



A

Ø
150
Pijpdiameter (mm)
Pipe diameter (mm)
Diamètre buse (mm)
Abgasstutzen (mm)

KG
350
Gewicht (kg)
Weight (kg)
Poids (kg)
Gewicht (kg)

→
Externe luchttoevoer
External air supply
Prise d'air extérieure
Externer Luftanschluss

%
82,0
Efficiëntie
Efficiency
Efficacité
Effizienz


⬆
Bovenaansluiting
Connection top
Raccordement dessus
Anschluss oben

🪨
Natuursteen
Natural stone
Pierre naturelle
Naturstein

kW
8,0
Vermogen output (kW)
Capacity output (kW)
Puissance output (kW)
Leistung output (kW)

⬇
Achteraansluiting
Connection back
Raccordement arrière
Anschluss hinten

B²
Bimsch 2
Bimsch 2
Bimsch 2
Bimsch 2

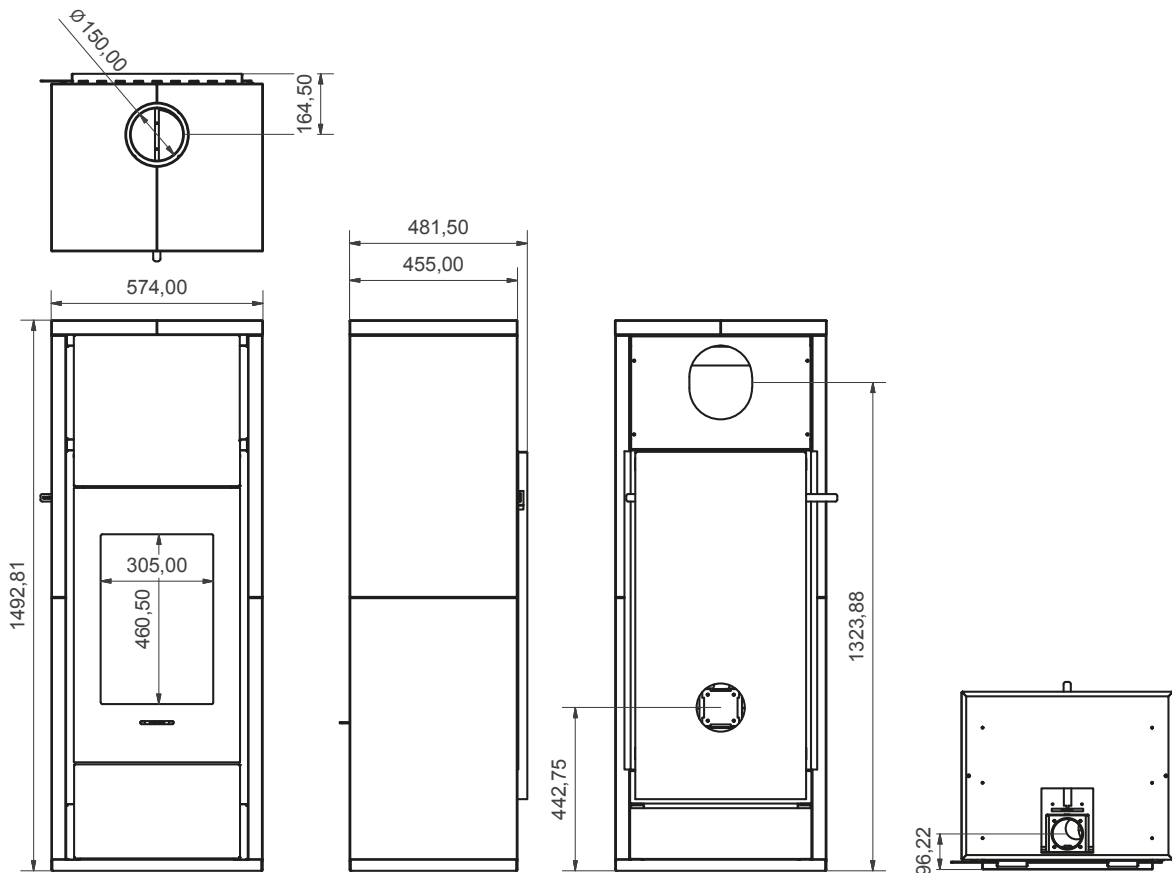

Pecan Eco M

GPE.0200



A

Ø
150
Pijpdiameter (mm)
Pipe diameter (mm)
Diamètre buse (mm)
Abgasstutzen (mm)

KG
310
Gewicht (kg)
Weight (kg)
Poids (kg)
Gewicht (kg)

Natuursteen
Natural stone
Pierre naturelle
Naturstein

%
82,0
Efficiëntie
Efficiency
Efficacité
Effizienz


Bovenaansluiting
Connection top
Raccordement dessus
Anschluss oben

B²
Bimsch 2
Bimsch 2
Bimsch 2
Bimsch 2

kW
8,0
Vermogen output (kW)
Capacity output (kW)
Puissance output (kW)
Leistung output (kW)

Externe luchttoevoer
External air supply
Prise d'air extérieure
Externer Luftanschluss

Hi²
HIGHLY INSULATED INTERIOR

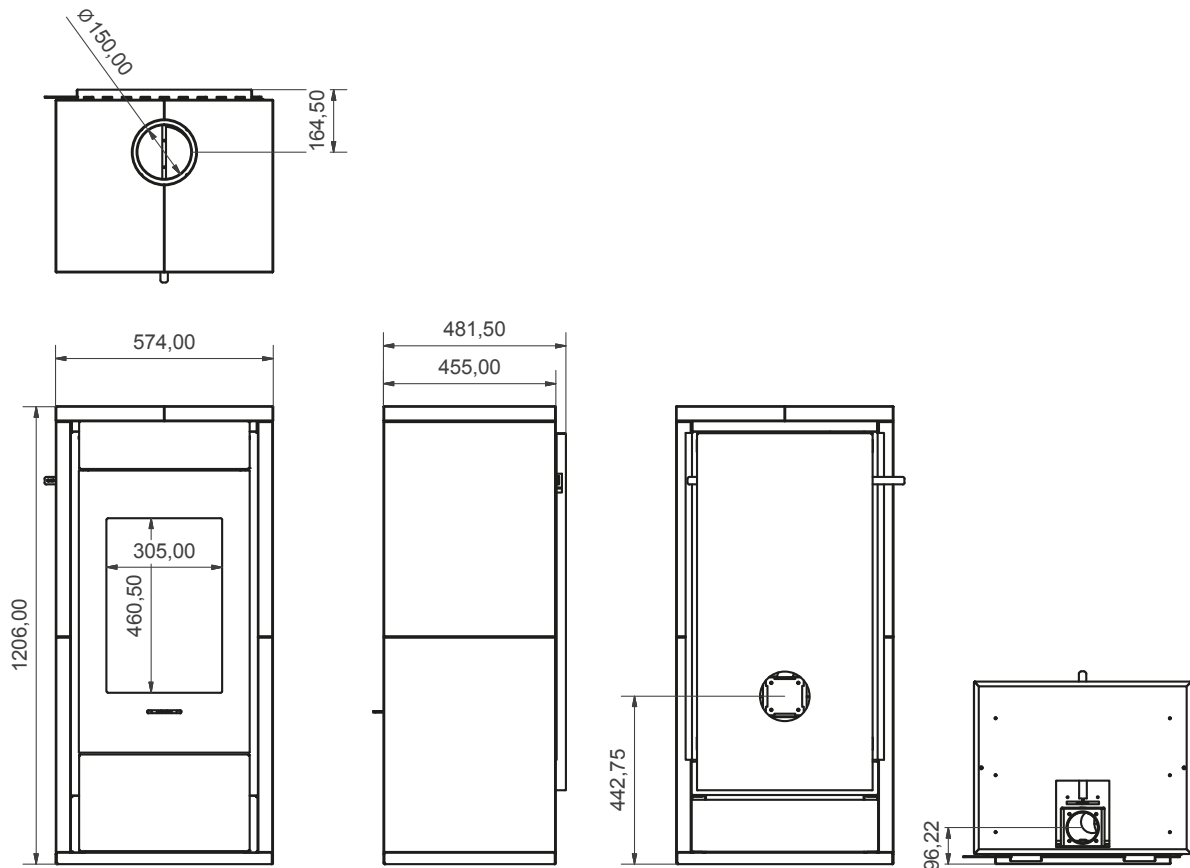

Wanders fires & stoves
Amtweg 4
7077 AL NETTERDEN
The Netherlands
Tel: +31(0)315 - 386 414
Fax: +31 (0)315 - 386 201
info@wanders.nl
www.wanders.nl

W wanders
fires & stoves



Ø
150
Pijpdiameter (mm)
Pipe diameter (mm)
Diamètre buse (mm)
Abgasstutzen (mm)

KG
290
Gewicht (kg)
Weight (kg)
Poids (kg)
Gewicht (kg)

Natuursteen
Natural stone
Pierre naturelle
Naturstein

%
82,0
Efficiëntie
Efficiency
Efficacité
Effizienz

Bovenaansluiting
Connection top
Raccordement dessus
Anschluss oben

B²
Bimsch 2
Bimsch 2
Bimsch 2
Bimsch 2

kW
8,0
Vermogen output (kW)
Capacity output (kW)
Puissance output (kW)
Leistung output (kW)

Externe luchttoevoer
External air supply
Prise d'air extérieure
Externer Luftanschluss

Hi²
HIGHLY INSULATED INTERIOR

